



DETAIL X
SCALE 2.5 : 1

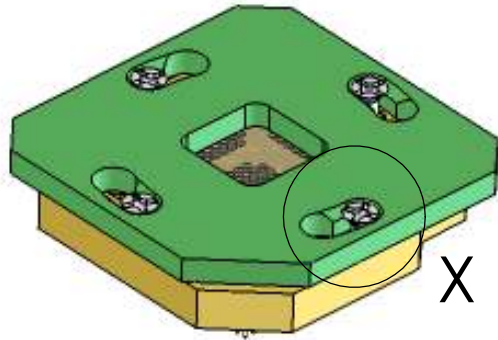


Step 1

To untighten a screwlock socket, use a Philips Head screwdriver

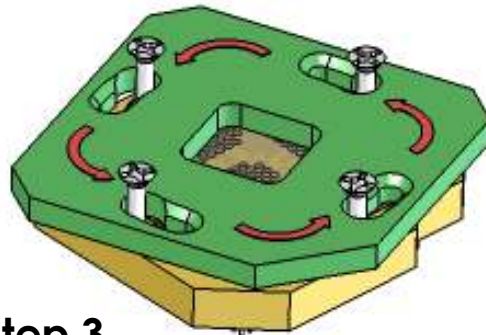


Step 3

Turn the twistlock retainer counter-clockwise by around 15°

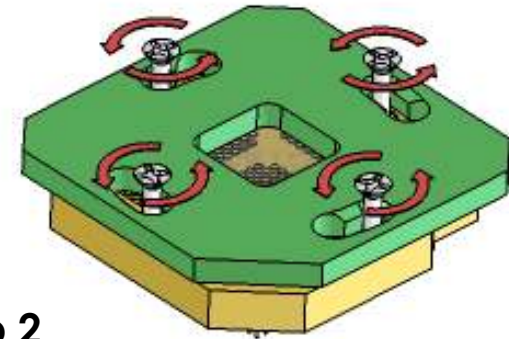


Step 2

Untighten the screws without removing them completely from the socket base

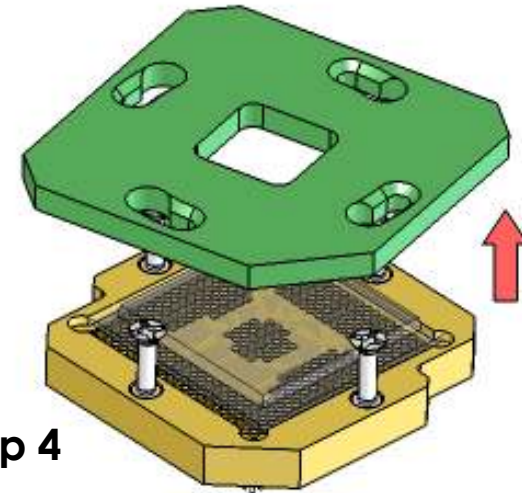

Step 4

Remove the retainer, leaving the screws attached to the socket base

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: GENERAL TOLERANCES: ±0.10 LINEAR: ANGULAR: "top view drawing"		Remark:					 www.e-tec.com
Patented		Visa	Date	Drawn by	Date	Visa	
DRAWN		FAI	31.05.05	FAI	31.05.05		
CHK'D				Echelle: 1.5:1		TITLE:	
APPV'D		K.S	31.05.05			Twist Lock	A4H
MFG						Fonctionnement	
Q.A				MATERIAL:		DWG NO.	
The information contained in this drawing is proprietary to E-tec and shall not be reproduced or disclosed in whole or in part or used for any design or manufacture except where such user possesses direct, written authorization from E-tec				WEIGHT:			
						SHEET 1 OF 1	