



DRD-1 xx-XS Z (Flat Type)






16 POSITIONS




10 POSITIONS




8 POSITIONS



DRD-2 xx-XS Z (Shaft Type)






16 POSITIONS

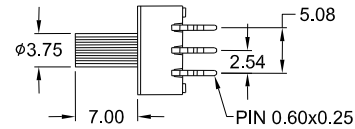


10 POSITIONS




8 POSITIONS



Construction



PCB Hole Layout



Code

Pin No.	POSITION															
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1	○	●	○	●	○	●	○	●	○	●	○	●	○	●	○	●
2	○	○	●	○	○	●	○	○	●	○	○	●	○	○	●	○
4	○	○	○	○	●	○	○	○	○	○	○	○	○	○	○	○
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

● Real Code

○ Complementary Code

Rotor color: White

Rotor color: Red

SPECIFICATIONS

Electrical data

Contact Rating	
-switching	25 mA, 24 V DC
-non-switching	100 mA, 50 V DC
Contact Resistance	
-initial	50 mΩ max.
-after life test	100 mΩ max.
Insulation Resistance	1000 MΩ min. at 100 V DC
Withstanding Voltage	250 V AC for 1 Minute

Mechanical and Environmental data

Operating Temperature	-25°C to +70°C
Storage Temperature	-40°C to +85°C
Operating Force	500 gf-cm max. (torque)
Mechanical Life	2000 steps per position
Vibration	10 Hz – 50 Hz – 10 Hz for 6 hours

FEATURES

- Molded-in terminals and fully sealed construction
- Standard 2.54mm pin to pin, and 7.62mm DIP space
- All plastics are UL 94V-0 grade fire retardant
- Reliable contact and long-term stability
- Binary decimal (8 or 10 positions) and hexadecimal (16 positions), real and complementary codes available
- Gold plated contacts to ensure low contact resistance. Terminals Tin plated.

How to order

DRD – x xx – XX Z

Rotor	
1	= Flat Type
2	= Shaft Type

Nbr of positions	
08; 10; 16	

Code	
RS	= Real 7.62mm row space
CS	= Complementary 7.62mm row space