



DOUBLE ROW

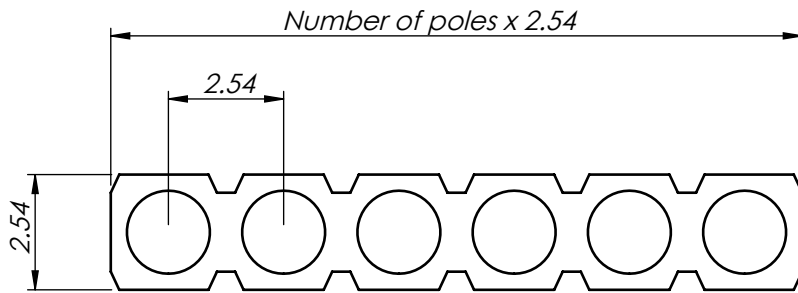

SINGLE ROW

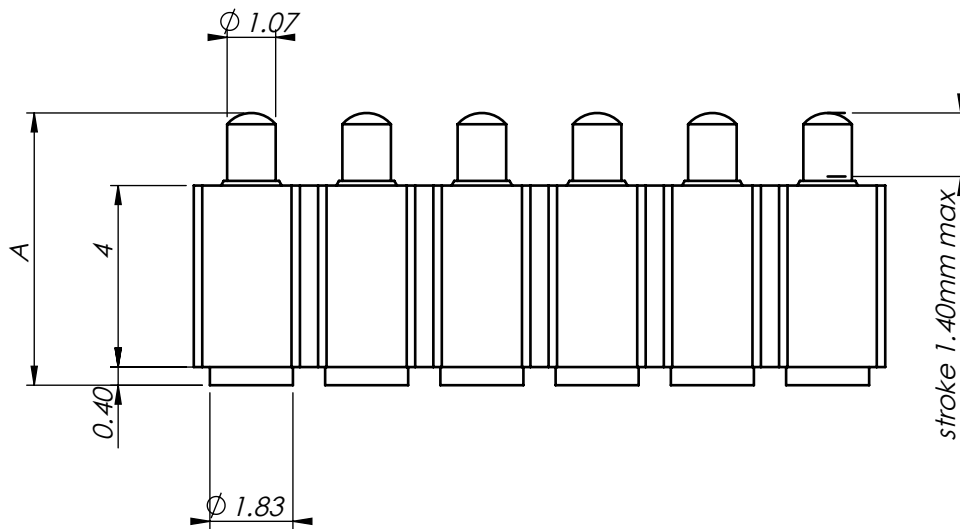

Insulator Flammability: UL 94V-0
 Piston and barrel: Brass
 Spring: Music wire gold plated
 Spring force : 0.25 N to 0.85 N
 Contact life: 50'000 cycles
 Current rating: 3.5 A
 Plating: Barrel: 0.25 μ m gold - Piston: 0.5 μ m gold

A4V Scale 6:1

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 GENERAL TOLERANCES ISO 2768m



Remark:

The information contained in this drawing is proprietary to E-tec and shall not be reproduced or disclosed in whole or in part or used for any design or manufacture except where such user possesses direct, written authorization from E-tec

REV	0	modif:	
NAME	sme	DATE	09.11.2014
DRAWN	sme	DATE	09.11.2014
REV'D	-	-	-
CHK'D	-	-	-
APP'VD	sme	DATE	09.11.2014

"E-tec order code" **PPS-XXX-M4XX-67**

1 = single row	Number of poles	60 A = 6.0mm
2 = dual row	Single row : 2 to 10	65 A = 6.5mm
	Dual row 4 to 20	70 A = 7.0mm
		75 A = 7.5mm

www.e-tec.com